




e-DIASTAR Type 514 PVC-U
100-230V
With solvent cement sockets metric

Model:

- Voltage 100-230V, 50-60Hz
- Multiturn Actuator
- Heating element, position feedback (Open/Close)
- Integrated manual emergency override
- Integrated stainless steel mounting inserts

Option:

- Other valve and actuator configurations available
- Optional accessories: Fail-safe return unit, Monitoring board, Position controller, Profibus DP board

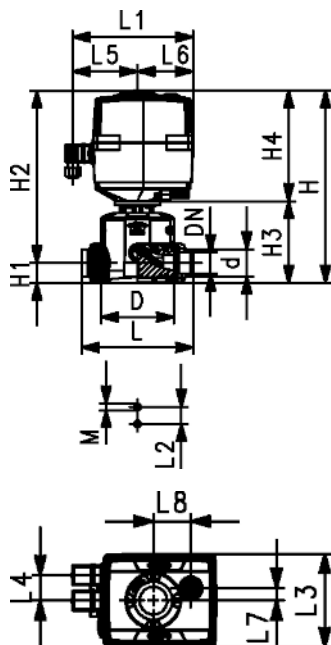

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-100-value ($\Delta p=1$ bar) (l/min)	EPDM Code	Weight (kg)	PTFE/EPDM Code	Weight (kg)
32	25	1	10	442	161 714 014	3.730	161 714 034	6.569
63	50	2	6	1575	161 714 017	2.488	161 714 037	6.597

kv-value ($\Delta p=1$ bar) (l/min)	D (mm)	D1 (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	L7 (mm)	L8 (mm)	L9 (mm)	H (mm)
442	109	58	166	180	25	122	33	97	83	16	49	190	286
1575	168	101	266	180	45	122	33	97	83	16	49		341

H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	z (mm)	M
30	20	256	121	165	122	M6
53	29	289	176	165	190	M8

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>