

Signet 9900 Transmitter

Member of the SmartPro™ Family of Instruments



Panel Mount

Field Mount

The Signet 9900 Transmitter provides a single channel interface for many different parameters including Flow, pH/ORP, Conductivity/Resistivity, Salinity, Pressure, Temperature, Level and other sensors that output a 4 to 20 mA signal. The extra large (3.90" x 3.90") auto-sensing backlit display features "at-a-glance" visibility that can be viewed at 4-5 times the distance over traditional transmitters. The highly illuminated display and large characters reduce the risk of misreading or misinterpreting the displayed values. The display shows separate lines for units, main and secondary measurements as well as a "dial-type" digital bar graph.

The 9900 is offered in both panel or field mount versions. Both configurations can run on 12 to 32 VDC power (24 VDC nominal). The 9900 can also be loop powered with compatible sensors.

Designed for complete flexibility, plug-in modules allow the unit to easily adapt to meet changing customer needs. Optional modules include Relay, Direct Conductivity/Resistivity, H COMM and a PC COMM configuration tool. The unit can be used with default values for quick and easy programming or can be customized with labeling, adjustable minimum and maximum dial settings, and unit and decimal measurement choices.

Features

- Multi-Parameter input selection
- Large auto-sensing backlit display with "at a glance" visibility
- "Dial-type" digital bar graph
- Intuitive and "user-friendly" interface consistent with legacy Signet ProPoint® and ProcessPro® devices
- Optional field upgradable relays
- Selectable error mode for current outputs, 3.6 mA or 22 mA
- 4 to 20 mA input (with optional 8058 Signal Converter)
- Warning LED indicator
- Custom 13-character label capabilities for the channel type
- Factory reset capability
- Optional PC COMM configuration tool
- Optional H COMM module for two-way communication



Applications

- Wastewater Treatment
- Reverse Osmosis
- Deionization
 - Ultra Pure Water
 - Two Bed System
 - Mixed Bed System
- Chemical Manufacturing/Addition
- Metal and Plastic Finishing
- Fume Scrubber
- Cooling Towers
- Media Filtration

Specifications

General			
Input Channels		One	
Input Types	Digital (S³L)	Serial ASCII, TTL level, 9600 bps	
	Frequency	Range	0.5 to 1500 Hz
		Accuracy	0.5% of reading
Measurement Types		Flow, pH/ORP, Conductivity/Resistivity, Salinity, Pressure, Temperature, Level or user-defined (via 8058)	
Enclosure and Display			
Case Material		PBT	
Window		Shatterproof glass	
Keypad		4 buttons, injection-molded silicone rubber seal	
Display		Backlit, 7 and 14-segment	
Update Rate		1 s	
LCD Contrast		5 settings	
Indicators		“Dial-type” digital bar graph. LEDs for Open Collector, Relays and Warning Indicator	
Enclosure Size		¼ DIN	
Mounting	Panel	¼ DIN, ribbed on four sides for panel mounting clip inside panel, silicon gasket included	
	Field	Mounts to standard Signet field mount junction boxes. Optional angle adjustment adapter available.	
	Wall	Large enclosure (sold as an accessory) that encases the panel mount transmitter	
Display Ranges			
pH		0.00 to 15.00 pH	
pH Temperature		-99 °C to 350 °C	-146 °F to 662 °F
ORP		-1999 to 1999.9 mV	
Flow Rate		-9999 to 99999 units per second, minute, hour or day	
Totalizer		0.00 to 99999999 units	
Conductivity		0.0000 to 99999 µS, mS, PPM and PPB (TDS), kΩ, MΩ	
Conductivity Temperature		-99 °C to 350 °C	-146 °F to 662 °F
Temperature		-99 °C to 350 °C	-146 °F to 662 °F
Pressure		-40 to 1000 psi	
Level		-9999 to 99999 m, cm, ft, in, %	
Volume		0 to 99999 cm³, m³, in³, ft³, gal, L, lb, kg, %	
Salinity		0 to 100 PPT	
Environmental			
Ambient Operating Temperature			
Backlit LCD		-10 °C to 70 °C	14 °F to 158 °F
Storage Temperature		-15 °C to 80 °C	5 °F to 176 °F
Relative Humidity		0 to 100% condensing for field mount; 0 to 95% non-condensing for panel mount	
Maximum Altitude		4,000 m (13,123 ft)	
Enclosure Rating		Designed to meet NEMA 4X/IP65 (front face only on panel mount); field mount is 100% NEMA 4X/IP65	

Specifications (continued)

Electrical Requirements

Power to Sensors

Voltage	+4.9 to 5.5 VDC @ 25 °C, regulated	
Current	1.5 mA max in loop power mode (up to 2.0 mA with 24 V @ 300 Ω max. loop impedance); 20 mA max when using DC power	
Short Circuit	Protected	
Isolation	Low voltage (< 48V AC/DC) to loop with DC power connected	
No isolation when using loop power only		
Terminal Blocks	Pluggable screw type	14 AWG max wire gauge

Input Power

DC	12 to 32 VDC ±10%, regulated
Overvoltage Protection	48 Volt Transient Protection Device
Current limiting for circuit protection	
Reverse-Voltage Protection	

Loop Power

No DC Power Input

	Max. Loop Impedance	50 Ω @ 12 V	325 Ω @ 18 V	600 Ω @ 24 V
--	---------------------	-------------	--------------	--------------

With DC Power Input

	Max. Loop Impedance	250 Ω @ 12 V	500 Ω @ 18 V	750 Ω @ 24 V
--	---------------------	--------------	--------------	--------------

Relay Specifications

Dry-Contact Relays		2	Open Collector	1
	Type	SPDT	N/A	
	Form	C	N/A	
Max. Current Rating		5 A resistive	50 mA DC	
Max. Voltage Rating		30 VDC or 250 VAC		
Hysteresis		Adjustable (absolute in engineering units) (EUs)		
Latch		Reset in test screen only		
Delay		9999.9 seconds (max.)		
Test Mode		Set On or Off		
Cycle Time		99999 seconds (max.)		
Maximum Pulse Rate		400 pulses/minute		
Proportional Pulse		400 pulses/minute		
Volumetric Pulse Width		0.1 to 3200 s		
Pulse Width Modulation		0.1 to 320 s		

Input Types

Digital (S³L) or AC frequency

4 to 20 mA input via the 8058

pH/ORP input via the Digital (S³L) output from the 2750 pH/ORP Sensor Electronics

Raw Conductivity/Resistivity input directly from Signet Conductivity/Resistivity electrodes via Direct Conductivity/Resistivity Module or via 2850

Input Specifications

Digital (S ³ L)		Serial ACSII, TTL level, 9600 bps
Frequency Input		
	Sensitivity	80 mV @ 5 Hz, gradually increasing with frequency
	Span	0.5 Hz to 1500 Hz @ TTL level input
	Accuracy	± 0.5% or reading max error @ 25 °C
	Resolution	1 μS
	Repeatability	± 0.2% of reading

Specifications (continued)

Input Specifications continued

Power Supply		
	Rejection	±1 µA per volt
	Short Circuit	Protected
Update Rate		(1/frequency) + 150 ms

Output Specifications

Current Output

Current Loop Output Standard	ANSI-ISA 50.00.01 Class H		
Current Output	4 to 20 mA, isolated, fully adjustable and reversible		
Span	3.8 to 21 mA		
Zero	4.0 mA factory set; user programmable from 3.8 to 5.0 mA		
Full Scale	20.00 mA factory set; user programmable from 19.0 to 21.0 mA		
Accuracy	±32 µA max. error @ 25 °C @ 24 VDC		
Resolution	6 µA or better		
Temperature Drift	±1 µA per °C		
Power Supply Rejection	±1 µA per V		
Isolation	Low voltage (< 48 VAC/DC)		
Voltage	12 to 32 VDC ±10%		
Max. Impedance (with DC power input)	250 Ω @ 12 VDC	500 Ω @ 18 VDC	750 Ω @ 24 VDC
Max. Impedance (no DC power input)	50 Ω @ 12 VDC	325 Ω @ 18 VDC	600 Ω @ 24 VDC
Update Rate	150 mS nominal		
Short circuit and reverse polarity protected			
Adjustable Span	Reversible		
Error Condition	Selectable error condition 3.6 or 22 mA		
Actual update rate determined by sensor type			
Test Mode	Increment to desired current (range 3.8 to 21.00 mA)		

Open Collector Output	50 mA DC max., 30 VDC	
-----------------------	-----------------------	--


Shipping Weights














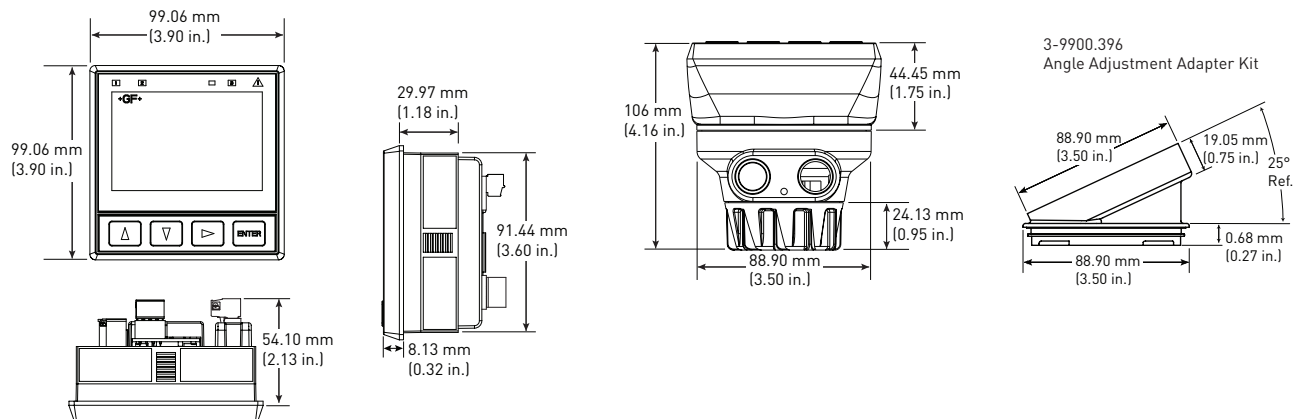





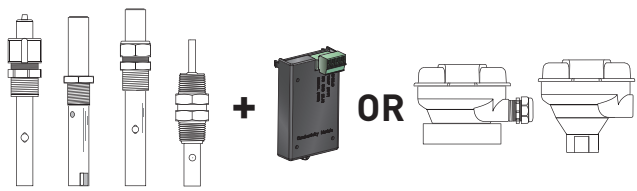
Base Unit	0.63 kg	1.38 lb
H COMM Module	0.16 kg	0.35 lb
Conductivity Module	0.16 kg	0.35 lb
Relay Module	0.19 kg	0.41 lb

Standards and Approvals

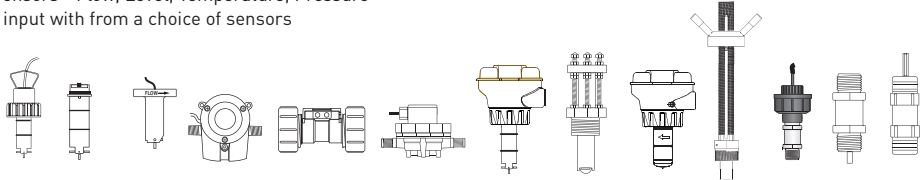CE, UL, CUL
RoHS Compliant, China RoHS
Manufactured under ISO 9001 and ISO 14001 for Environmental Management

Dimensions

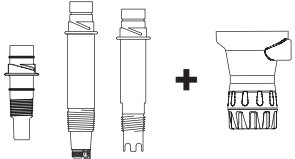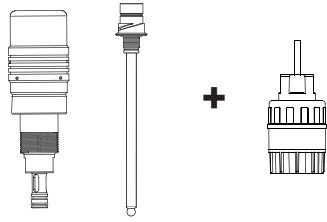

<p>Panel Mount</p> <p>Signet Model 9900 Transmitter (Includes mounting bracket and panel gasket)</p> 	<p>Field Mount - Pipe, Tank, Wall</p> <p>Signet Model 9900 Transmitter with Junction Box (varies with sensor and installation)</p>      <p>3-8050 3-8051 3-8052 3-9900.396 (optional)</p>
<p>Signet Sensors - Flow, Level, Temperature, Pressure use one input with from a choice of sensors</p>  <p>515 8510 525 2000 2100 2507 2537 2540 2551 2552 2250 2350 2450 2536 8512</p> <p>Signet Fittings - See individual sensor data sheets All sold separately</p>	
<p>Panel Mount</p> <p>Signet Model 9900 Transmitter (Includes mounting bracket and panel gasket)</p> 	<p>Field Mount - Pipe, Tank, Wall</p> <p>Signet Model 9900 Transmitter with Junction Box (varies with sensor and installation)</p>     <p>3-8050 3-8052 3-9900.396 (optional)</p>
<p>Signet Sensors - pH/ORP use one input from a choice of sensors With 2750 Sensor Electronics</p> 	<p>Signet Wet-Tap Electrode Model 2756, 2757 and 3719 Wet-Tap with 2750 Sensor Electronics</p>  <p>Signet Fittings - See individual sensor data sheets All sold separately</p>
<p>Panel Mount</p> <p>Signet Model 9900 Transmitter (Includes mounting bracket and panel gasket)</p> 	<p>Field Mount - Pipe, Tank, Wall</p> <p>Signet Model 9900 Transmitter with 3-9900.396 Angle Adapter and Junction Box (varies with sensor and installation)</p>     <p>3-9900.396* 3-8050 3-8052</p>
<p>Signet Sensors - Conductivity/Resistivity and Salinity Electrodes use one input from a choice of electrodes with Conductivity Module or 2850 Sensor Electronics</p>  <p>Signet Fittings - See individual sensor data sheets All sold separately</p>	


*3-9900.396 is required with the Conductivity Module and either 3-8050 or 3-8052 to provide sufficient clearance.

Plug in Modules

Optional modules are available to customize your 9900:

- Relay Module (Panel mount only)
- Direct Conductivity/Resistivity Module
- H COMM Module

All modules come enclosed in a plastic cover. Modules are field installable and replaceable any time.

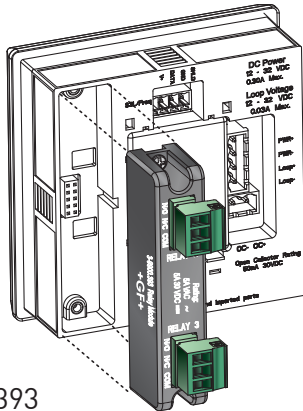


3-9900.393

Relay Module (Panel Installations only)

Dry-contact relays are electromechanical switches with a moving contact armature. They are suitable for many general purpose applications, AC or DC, including loads up to 250 V. Install RC Filter kits (3-8050.396) on relays used to switch motor or inductive loads.


This module adds two programmable dry-contact relays to the standard Open Collector output in the base unit.

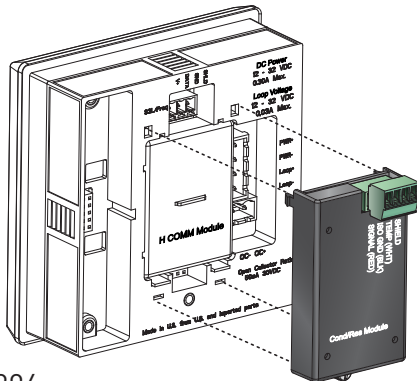

3-9900.394

Direct Conductivity/Resistivity Module

The Direct Conductivity/Resistivity Module interfaces Signet 2819-2823 and 2839-2842 Conductivity electrodes directly to the 9900. The module also provides filtering and conditioning. (Conductivity/Resistivity and Salinity measurements may also be performed via the 2850 Sensor Electronics connected through the 9900 Digital (S³L) inputs.).

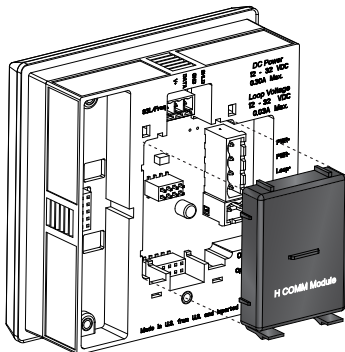


3-9900.395

H COMM Module (HART®)


The H COMM Module enables communication between the 9900 and a HART®-enabled device. The HART (Highway Addressable Remote Transducer) Protocol superimposes digital signals on top of the 4 to 20 mA analog signal.

Refer to the 9900 H COMM Module Manual 3-9900.094 for further details.

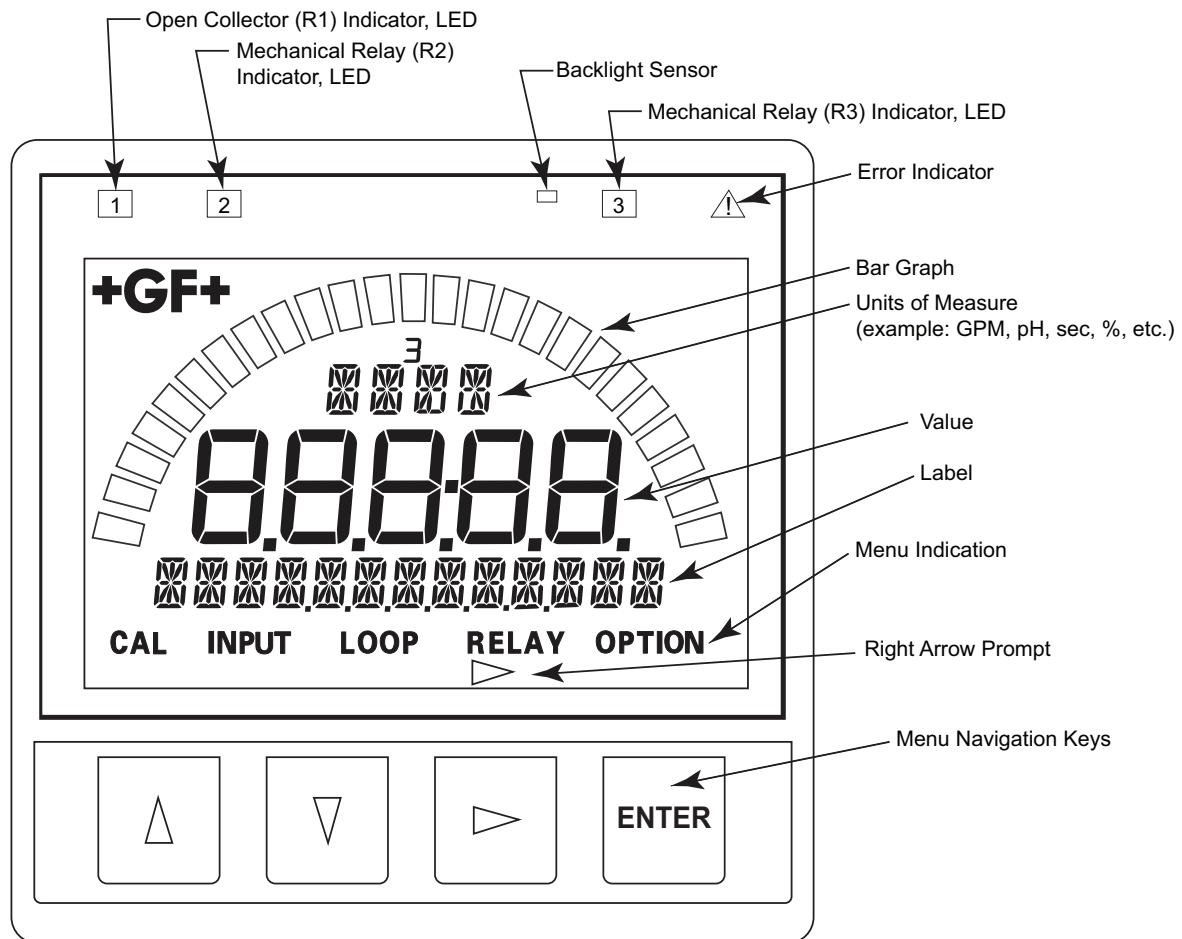


All possible segments shown in this illustration. The instrument's software controls which segments are shown at any particular time. Only the bar graph segment outline and GF logo are visible when the unit is turned off.

The Angle Adjustment Adapter Kit enables the 9900 transmitter to be mounted virtually anywhere. Field Mount Installations with a Conductivity/Resistivity Module require the Angle Adjustment Adapter Kit for wiring clearance.

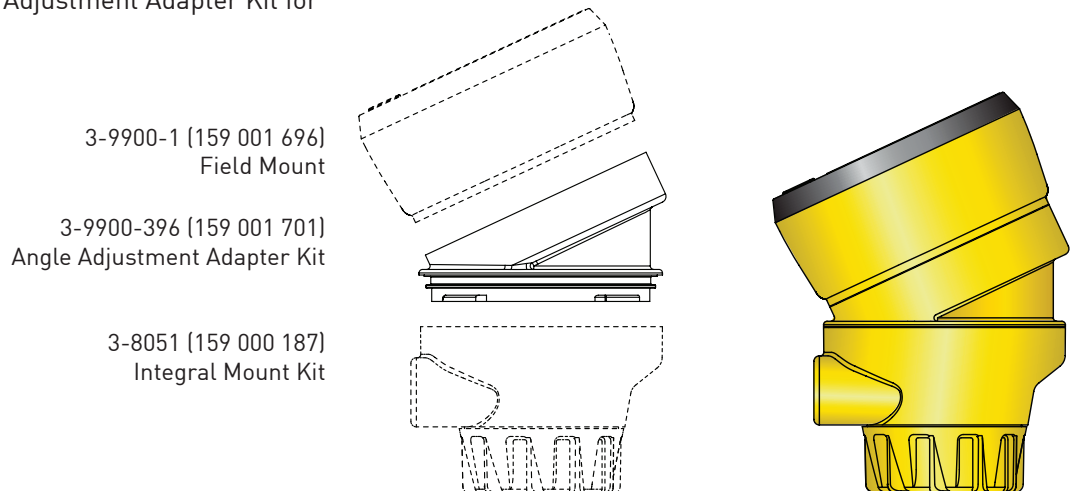

Ordering Information

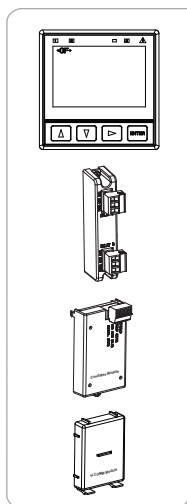

Mfr. Part No	Code	Description
9900 Base Unit - Single Channel, Multi-Parameter, 4 to 20 mA, Open Collector, DC power		
3-9900-1P	159 001 695	9900 Panel Mount Transmitter
3-9900-1	159 001 696	9900 Field Mount Transmitter
Optional Accessory Modules		
3-9900.393	159 001 698	Relay Module - 2 DCR (Dry-contact relays)
3-9900.394	159 001 699	Direct Conductivity/Resistivity Module
3-9900.395	159 001 697	H COMM Module

Accessories and Replacement Parts

Mfr. Part No	Code	Description
6682-0204	159 001 709	Conductivity Module Plug, 4 Pos, Right Angle
6682-1102	159 001 710	DC Power Plug, 2 Pos, Right Angle
6682-1103	159 001 711	Relay Module Plug, 3 Pos, Right Angle
6682-1104	159 001 712	Loop Power Plug, 4 Pos, Right Angle
6682-3004	159 001 725	Terminal Block Plug
6682-3104	159 001 713	Freq/S ³ L Plug, 4 Pos, Right Angle
7300-7524	159 000 687	24 VDC power supply 7.5 W, 300 mA
7300-1524	159 000 688	24 VDC power supply 15 W, 600 mA
7300-3024	159 000 689	24 VDC power supply 30 W, 1.3 A
7300-5024	159 000 690	24 VDC power supply 50 W, 2.1 A
7300-1024	159 000 691	24 VDC power supply 100 W, 4.2 A
3-0251	159 001 724	PC COMM Configuration Tool
3-8050	159 000 184	Universal Mount Kit
3-8050.396	159 000 617	RC Filter kit (for relay use), 2 per kit
3-8051	159 000 187	Flow Sensor Integral Mount Kit
3-8052	159 000 188	¾ in. Integral Mount Kit
3-8058-1	159 000 966	I-Go™ Signal Converter, wire-mount
3-8058-2	159 000 967	I-Go™ Signal Converter, DIN rail mount
3-9000.392-1	159 000 839	Liquid Tight Connector Kit, NPT (1 pc.)
3-9900.390	159 001 714	Standard Connector Kit, Right Angle, 9900 Transmitter
3-9900.391	159 001 715	Optional Connector Kit, In-Line, 9900 Transmitter
3-9900.392	159 001 700	Wall Mount Accessory Kit for 9900
3-9900.396	159 001 701	Angle Adjustment Adapter Kit (for Field Mounting)

3-9900.099 Rev A (9/11)

© Georg Fischer Signet LLC

3401 Aerojet Avenue, El Monte, CA 91731-2882 U.S.A. • Tel. (626) 571-2770 • Fax (626) 573-2057 • www.gfsignet.com • e-mail: signet.ps@georgfischer.com
 Specifications subject to change without notice. All rights reserved. All corporate names and trademarks stated herein are the property of their respective companies.